

OGME, Inc.

Website OGME.NET

Oil and Gas Measurement Equipment, Inc.

**5227 Dow Road
Houston, TX 77040**

**Phone: 713-263-9740
Fax: 713-263-9741**

**P.O. Box 55641
Houston, TX 77255**

**Email: sales@ogme.net
Email: rcaitken@ogme.net**

Hydrostatic Test Cart:

Built with a HIP Sprague air driven hydraulic pump available in four pressure ranges. Pumps require minimum 40 psi shop air and maximum of 100 psi.


- 0-10,000 psi (S-216-JB-100)- 1/4" NPT Connections
- 0-15,000 psi (S-216-JB-150)- 1/4" HP Connections
- 0-20,000 psi (S-216-JB-200)- 1/4" HP Connections
- 0-30,000 psi (S-216-JB-300)- 1/4" HP Connections



All hydrotest carts include air regulator with gauge, air line oiler, bleed valve, isolation valve, water filter, calibrated pressure gauge, and Spir Star hose rated to pump capabilities. Additional accessories available are chart recorders and digital data logging gauges. Please email or call for a quote.

Dimensional Information:

Dimensions are in inches and the height of the pump is figured from the floor to the top of the air regulator. Hydrotest cart weighs approximately 75 pounds.

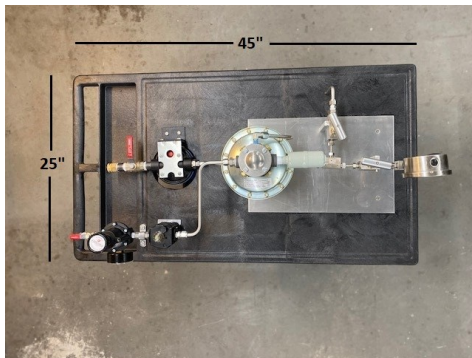

All pumps are hydrostatic tested for one hour on a calibrated chart recorder. A report with chart and calibration certificate will be supplied with each pump. Delivery is about four weeks, rentals are available upon request.